



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**29.11.2000 Bulletin 2000/48**

(51) Int. Cl.<sup>7</sup>: **H04N 1/407**

(21) Application number: **00201646.7**

(22) Date of filing: **08.05.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
 Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **20.05.1999 US 315647**

(71) Applicant: **EASTMAN KODAK COMPANY**  
**Rochester, New York 14650 (US)**

(72) Inventors:  
 • **Gilman, Paul B**  
**Rochester, New York 14650-2201 (US)**

• **Parulski, Kenneth Alan**  
**Rochester, New York 14650-2201 (US)**

• **Spaulding, Kevin E**  
**Rochester, New York 14650-2201 (US)**

• **Collette, Robert P.**  
**Rochester, New York 14650-2201 (US)**

• **Hamilton, John F.**  
**Rochester, New York 14650-2201 (US)**

(74) Representative:  
**Lewandowsky, Klaus, Dipl.-Ing. et al**  
**Kodak Aktiengesellschaft,**  
**Patentabteilung**  
**70323 Stuttgart (DE)**

(54) **Correcting exposure in a rendered digital image**

(57) A method for correcting for exposure in a digital image, including the steps of providing a rendered digital image suitable for display and displaying such digital image; using an adjustable exposure setting to nonlinearly modify the rendered digital image to effect an exposure change and displaying the exposure modified rendered digital image; and iteratively changing the adjustable exposure setting in accordance with the non-linear function to continuously change the exposure setting and display modified digital images until a desired exposure modified rendered digital image is displayed.

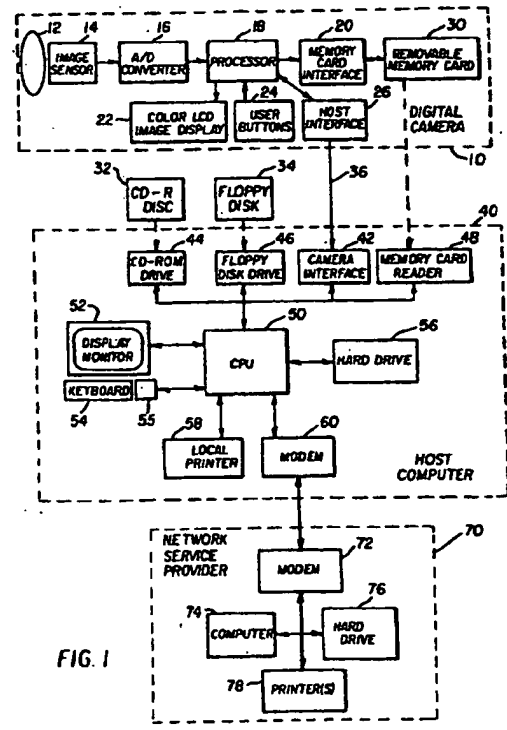


FIG. 1

## Description

[0001] The present invention relates to a method for correcting for exposure in rendered digital images captured by a digital camera or the like, which corrected images are particularly suitable for printing.

[0002] Digital images which can be captured by scanners or digital cameras, or produced by a computing process, have to be reheadered so that they can be properly viewed on a display. The resulting digital images are often referred to as being in a "rendered" image space, such as sRGB, where the relationship between the image code values and the scene luminance values is very non-linear, as depicted in FIG 8. Digital images, whether obtained from scanned film or from digital cameras, often contain exposure errors, where the key subjects of the picture are lighter or darker than desired by the user, due to imperfect exposure determination algorithms in the digital camera or film scanner which created the digital image. Many imaging applications, such as Adobe Photoshop or Kodak PictureEasy, permit the user to adjust the "brightness", "contrast", and/or "gamma" of the image by sliding using one or more "sliders" controlled by a mouse. Each control adjusts one of the slope, x-intercept, or exponential function applied to the image, typically using a look-up table, in order to modify the tone reproduction of the image when it is displayed or printed. However, because they do not directly adjust the scene exposure, they do not properly compensate for camera exposure errors. While it is possible to somewhat improve the image using such controls, it is extremely difficult for unskilled users to determine how to best set these multiple controls.

[0003] Some applications, such as Adobe Photoshop, also permit the user to modify a "lookup table" by inputting a curve of any arbitrary shape. However, only a skilled user is able to determine what curve shape provides the best image, and only then using a tedious trial-and-error process.

[0004] It is an object of the present invention to provide a method that properly compensates for camera exposure errors which is extremely simple for a non-expert to understand and use.

[0005] This object is achieved in a method for correcting for exposure in a digital image, comprising the steps of:

- (a) providing a rendered digital image suitable for display and displaying such digital image;
- (b) using an adjustable exposure setting to nonlinearly modify the rendered digital image to effect an exposure change and displaying the exposure modified rendered digital image; and
- (c) iteratively changing the adjustable exposure setting in accordance with the nonlinear function to change the exposure setting and display modified digital images until a desired exposure modified rendered digital image is displayed.

[0006] It is an advantage of the present invention that exposure problems can be properly compensated with a minimum of user intervention.

[0007] Another advantage of the present invention is that it is extremely simple for a non-expert user to understand and use.

[0008] A feature of the invention is that it is particularly suitable for adjusting rendered digital images captured by an image capture device and for causing a printer to make aesthetically pleasing prints of images.

FIG. 1 is a block diagram of a system that can use the method of the present invention;

FIG. 2 is a flow diagram of a process for practicing the present invention;

FIG. 3 depicts a thumbnail screen that forms part of the graphical user interface used in the process of FIG. 2;

FIG. 4 shows the exposure adjustment screen, incorporating an adjustable exposure setting control, that forms part of the graphical user interface used in the process of FIG. 2;

FIG. 5 depicts a screen for selecting printing parameters for a printer;

FIGS. 6a-6c depict correction curve shapes produced by different positions of the adjustable exposure setting depicted in FIG. 4;

FIGS. 7a-7b depict two tone correction curve shapes for use with two different types of printers and print media combinations;

FIG. 8 depicts a possible rendering curve for a rendered digital image; and

FIG. 9 shows an alternate embodiment of the exposure adjustment screen, incorporating an adjustable exposure setting control and a scene contrast setting control.

[0009] FIG. 1 is a block diagram of a system that can use the method of the present invention. The system includes a digital image source, such as a digital camera 10 or a film scanning system and digital writing system (not shown) that records digitized film image files on a recordable compact disc (CD-R) 32 or a floppy disk 34. The system also includes a host computer 40 and a networked printing service 70. An imaging application running on the host computer 40 permits a rendered-space image, such as an sRGB color space Exif version 2.1 image file, to be manipulated by a user. The Exif image format is defined in "Digital Still Camera Image File Format Standard, Exchangeable image file format

for Digital Still Camera: Exif, JEIDA-49-1998, June 1998 by the Japan Electronics Industries Development Association (JEIDA) and the sRGB color space is described in "A standard default color space for the internet - sRGB by Michael Stokes, et. al., available at <http://www.color.org/sRGB.html>.

[0010] The digital camera 10 produces digital images that are stored on a removable memory card 30. The digital camera 10 includes a lens 12 having an adjustable aperture and shutter (not shown) for focusing light from a scene (not shown) on an image sensor 14, for example a single-chip color CCD image sensor, using the well-known Bayer color filter pattern. The analog output signal from the image sensor 14 is converted to digital data by the A/D converter 16. The digital data is processed by a processor 18, and the processed digital image file is provided to a memory card interface 20 which stores the digital image file on the removable memory card 30. Removable memory cards 30 are known to those skilled in the art. For example, removable memory card 30 can include memory cards adapted to the PCMCIA card interface standard, as described in the *PC Card Standard, Release 2.0*, published by the Personal Computer Memory Card International Association, Sunnyvale, California, September 1991. Removable memory card 30 can also be adapted to the Compact Flash interface standard, such as described in the *CompactFlash Specification Version 1.3*, published by the CompactFlash Association, Palo Alto, California, August 5, 1998.

[0011] The processor performs color interpolation followed by color and tone correction, in order to produce rendered sRGB image data. The rendered sRGB image data is then JPEG compressed and stored as an Exif version 2.1 file on the removable memory card 30. The processor also provides "thumbnail" size image data to a color LCD image display 22, which displays the captured image for the user to review. The camera is controlled by a series of user buttons 24.

[0012] After a series of images have been taken and stored on the removable memory card 30, the removable memory card 30 may be inserted into a memory card reader 48 in the computer. Alternately, an interface cable 36 may be used to connect between host interface 26 in the digital camera 10 and the camera interface 42 in the computer 40. The interface cable may conform to, for example, the well-known universal serial bus (USB) interface specification.

[0013] The images from the digital camera 10 are processed by the computer 40 using enabling software provided on a digital media, such as a CD-R disc 32 or floppy disc 34. Alternately, the enabling software may be downloaded to the computer from a networked printing service 70 via modem 60 and stored on hard drive 56. A CPU 50 uses the software in accordance with the present invention to provide exposure modified rendered digital images, as will be described in more detail in FIGS. 2-6. The CPU 50 is directly coupled to a display monitor 52 and a keyboard 54. A mouse 55 permits the user to readily communicate with the CPU 50. The CPU 50 is in direct communication with a local printer 58, such as an Epson Stylus Photo 700 printer, which produces hard copy prints of the exposure modified rendered digital images.

[0014] Alternately, prints may be made at a networked printing service 70 which receives exposure modified rendered digital image files from the host computer 40 using modem 72 and stores the images on local hard drive 76. A computer 74 controls printer(s) 78, which may include, for example, silver halide or dye sublimation printers to print the digital image files, which are then mailed to the user of the host computer 40. The exposure modified rendered digital images may also be e-mailed to other computers (not shown) using modem 60.

[0015] FIG. 2 depicts a block diagram of a process in accordance with the present invention. In step 100, the user of host computer 40 launches the enabling software application. In step 102, the application displays an introduction screen on display monitor 52, which asks the user to select the source of the images. In step 104, the user selects the image source. The image source can be for example the removable memory card 30 in memory card reader 48, digital camera 10 using camera interface 42 (with the camera 10 serving as the memory card reader for removable memory card 30), the floppy disk 34 in floppy disk drive 46, or the CD-R disc 32 in CD-ROM drive 44. In step 106, images from the image source selected in step 104 are displayed using the thumbnail screen shown in FIG. 3.

[0016] FIG. 3, which depicts a thumbnail screen that forms part of the graphical user interface displayed on display monitor 52, includes a two-dimensional array of thumbnail images 302 obtained from the image source, such as the removable memory card 30 from digital camera 10. The thumbnail images 302 preferably have a lower resolution than the full size images stored on removable memory card 30. In step 108, the user can select one or more images (for example four images) by clicking the mouse 55 on any number of thumbnail images 302. FIG. 3 shows that four thumbnail images 302a, 302b, 302c, and 302d (which are outlined) have been selected. If the removable memory card 30 contains a large number of thumbnail images 302, arrow controls 304 on the right portion of the "preview picture screen" 300 enable the user to scroll through the larger number of thumbnail images 302 to view a group of the thumbnail images 302 (for example, 15 thumbnail images) at a time.

[0017] Adjacent the thumbnail screen 300 is a set of function icons including a "print" icon 308, a "slide show" icon 310, and an "improve image icon" 312. After one or more thumbnail images 302 have been selected in step 108, the user can choose to compensate for camera exposure errors in the selected images 302 by selecting the "improve image" icon 312 in step 110. In step 112, the CPU 50 displays the exposure adjustment screen shown in FIG. 4.

[0018] FIG. 4 depicts the exposure adjustment screen 340 that forms part of the graphical user interface displayed on display monitor 52. The screen includes a "before" correction picture 350, an "after" correction picture 352, and a

user adjustable exposure setting interface 354 having a control bar 356 with a user adjustable control position setting 358. When the image to be improved (for example image 302a in FIG. 3) is first displayed, the CPU 50 displays the uncorrected image as both the "before" correction image 350 and the "after" correction image 352, and sets the control setting 358 to the middle (for example no correction) position.

5 [0019] As the user moves the control setting 358 to the left (towards darken) the image data used to display the "after" correction image is modified using a lookup table implementing a non-linear function that nonlinearly modifies the rendered digital image to effect an exposure change. The non-linear function modifies the digital image to cause the brightness of the highlights, mid-tones, and shadows of the modified digital image look the same as if the camera had provided a lower exposure level to the image sensor when the image was captured by the digital camera 10 or the film  
10 camera (not shown), as will be described later in reference to FIGS. 6a-6c. Moving the control setting 358 to the right (towards lighten) causes the image data to be modified using a lookup table that causes the modified digital image to appear as if the camera had provided a correspondingly higher exposure level.

[0020] Instead of a control bar 356, the user adjustable exposure setting interface 354 could use one of many other well-known user interface techniques, such as up/down arrows, a box for entering a numeric value, or a radio button  
15 selector.

[0021] The exposure setting provided by exposure setting interface 354 is immediately applied to the low resolution data that provides the "after" correction image 352 on the computer screen. The user views the uncorrected image in the "before" correction image 350 and the "after" correction image 352, and iteratively adjusts control setting 358 until  
20 the setting, the "OK" icon 360 is selected, and control setting 358 is stored in step 114. In step 116, if there are more images, the CPU 50 displays the next image selected by the user (for example image 302b in FIG. 3) as both the "before" correction image 350 and the "after" correction image 352, and returns the control setting 358 to the middle (for example no correction) position. If the user instead selects the "Cancel" button 362, the exposure control setting is not stored, and the display 52 returns to the thumbnail screen shown in FIG. 3. Once the last selected image has been  
25 exposure corrected, the thumbnail screen shown in FIG. 3 is displayed, using the stored exposure correction settings to modify the thumbnail image data for each of the exposure corrected images (for example 302a, 302b, 302c, and 302d).

[0022] In step 120, the user selects images to be printed from the thumbnail screen in FIG. 3 by clicking the mouse 55 on any number of thumbnail images 302 or by using the select all images icon 306 and then selects the print icon 308. CPU 50 then displays the printing screen 400 shown in FIG. 5, which forms part of the graphical user interface displayed on display monitor 52. The user then chooses a type of layout using one of several predefined "layout" icons 402 on the periphery of the "print function display screen" 400. The selection determines how many pictures appear on each page by selecting, for example, 1, 2, 4, 9, or 16 images to be printed per page. Once a predefined layout is chosen, the images to be printed appear in a print preview area 422 on the "print function display screen" 400. Based on the  
30 number of selected pictures to be printed on a page, the program automatically selects the orientation of the images to best fill up the page. FIG. 5 shows, as an example, four images 420a, 420b, 420c, and 420d, which correspond to the selected thumbnail images 302a, 302b, 302c, and 302d, respectively, shown in FIG. 3.

[0023] The user then selects number of sets of images to print, for example, three copies of each laid out page. The selection is made by typing in the number of desired sets in a text field on the left portion of the "number of sets" control  
40 box 408, or by using the up and down arrow keys on the right portion of control box 408.

[0024] If a user desires to print the images on a local printer 58, the user selects the media type (for example plain paper, Kodak photo paper, or Epson photo paper) 404 in step 122. Finally, the user selects the "local print" icon 410. The user can then walk away from the host computer 40, while each of the selected images is corrected and printed automatically on the local printer 58, without further user interaction. To perform the correction, the type of printer (for  
45 example Epson Stylus Photo 700) can be automatically determined from the print driver. The printer calibration table for the particular combination of printer and print media selected by the user, provided with the enablement software, is retrieved from the hard drive 56, CD-R disc 32, or floppy disk 34. In step 128, the exposure adjustment and printer / media calibration is performed on the image data to be printed as part of the printing process, as will be described later in reference to FIGS. 6a-6c and FIGS. 7a- 7b. In step 130, this corrected data is used by the local printer 58 to produce  
50 exposure corrected prints.

[0025] Alternately, in step 120 the user may select the internet printing service (for example "print at Kodak") icon 412. In step 140, the user enters their credit card number and shipping address using a screen (not shown). In step 142, the images and the associated exposure adjustment values for any exposure corrected images are sent using modem 60 in the host computer 40 to modem 72 at the printing service provider 70 where they are stored together on hard drive  
55 76. In step 144, the exposure adjustment is performed on the image data to be printed, as part of the printing process, as will be described later in reference to FIGS. 6a-6c. In step 146, exposure corrected prints are mailed to the user.

[0026] A camera's exposure setting is determined by the lens f/number and shutter exposure time used when capturing an image. For some types of scenes, for example a picture of a person with the sun or bright sky in the back-

ground, the camera may provide too little exposure to the image sensor, as a result of an exposure determination error. The exposure adjustment screen 340, described earlier in reference to FIG. 3, permits a non-expert user to interactively adjust an image to appear lighter or darker. This compensates for exposure determination errors which occurred when the original image was taken with a digital camera 10 or when film was exposed and scanned to create digital images on a CD-R disc 32 or floppy disk 34. The resulting exposure corrected digital image is aesthetically pleasing, and has the same tone reproduction as would have been provided had the proper exposure level been used when the image was captured or digitized.

[0027] FIG. 8 depicts an example of the relationship between the logarithm of the scene luminance values and the output code values for a typical digital camera or digitized film source, such as PictureCD. This demonstrates one possible rendering curve for a rendered (for example sRGB) digital image. This curve can be defined as a rendering transform:

$$CV = T_{\log}(\log L) \quad \text{equation 1}$$

where CV is the rendered code value, L is the scene luminance, and  $T_{\log}$  is the rendering transform.

[0028] Due to the non-linear nature of the rendering transform  $T_{\log}$ , it is not possible to correct for exposure errors in such a rendered digital image by simply adjusting the rendered code values using a function of the form:

$$CV' = 255 * (A + B * (CV/255)^D) \quad \text{equation 2}$$

where CV is the uncorrected sRGB code value, CV' is the corrected sRGB code value, A is an offset (for example brightness) correction value, B is a gain (for example contrast) correction value, and D is a exponential (for example gamma) value.

[0029] To properly correct for exposure errors, it is desirable to determine what the original relative scene luminance or scene log luminance values were.

[0030] This can be done, for example, by:

(1) Converting the rendered code values back to scene log luminance values using an equation of the form:

$$\log E = T_{\log}^{-1}(CV) \quad \text{equation 3}$$

where  $T^{-1}()$  is the inverse of the rendering transform T

(2) Adding an exposure Offset to the scene log luminance values

$$\log E' = \log E + \text{Offset} \quad \text{equation 4}$$

where Offset is the exposure correction offset

(3) Re-rendering the corrected Log E' value using the rendering transform

$$CV' = T_{\log}(\log E') = T_{\log}(T_{\log}^{-1}(CV) + \text{Offset}) \quad \text{equation 5}$$

Alternately, similar equations could be formulated for a rendering function  $T_{\text{lin}}$  having as input linear scene luminance values rather than log scene luminance values. In this case, the exposure correction is accomplished by multiplying the linear scene luminance values by a Gain correction value, as shown by:

$$CV' = T_{\text{lin}}(T_{\text{lin}}^{-1}(CV) * \text{Gain}) \quad \text{equation 6}$$

[0031] Steps (1) through (3) can be combined into a single equation or implemented using a single lookup table derived for a particular exposure correction setting.

[0032] FIGS. 6a-6c depict three different exposure modification curve shapes corresponding to three different exposure setting values. FIG. 6a, shows an exposure setting value of 0, corresponding to no correction. In this case, since the Offset value = 0 in equation 5, the output code values are equal to the input code values. The 0 setting is the initial setting for the adjustable control position setting 358 in FIG. 4, and causes the initial "after" correction picture 352 be identical with the "before" correction picture 350, before the user adjusts the user adjustable control position setting 358.

[0033] FIG. 6b shows the exposure correction curve shape for an exposure shift of +2 stops. When this lookup table is applied to the image data used for the "before" correction image 350, it causes the "after" correction image 352 to appear as if the camera used to capture the image (for example digital camera 10) had provided 2 stops more exposure

(for example a 4X increase in exposure time) to the image sensor 14 when the image was captured. FIG 6c shows the exposure correction curve shape for an exposure shift of -2 stops. When this lookup table is applied to the image data used for the "before" correction image 350, it causes the "after" correction image 352 to appear as if, for example, the digital camera 10 had provided 2 stops less exposure (for example 1/4 the actual exposure time) to the image sensor 14 when this image was captured.

[0034] For example, the table below shows an example of rendered code values for three different camera exposure levels for a gray scale test chart with 6 neutral patches corresponding to the example rendering transform depicted in FIG 8. The column labeled "density" provides the density values of each test patch, where:

$$\text{Density} = -\log(\text{reflectance})$$

equation 7

[0035] The column labeled "CV normal exposure" provides the rendered code values when the sensor was properly exposed when the image was captured. In this case, no exposure correction is required. The column labeled "CV -2 stops exposure" provides the rendered code values when the sensor was underexposed by 2 stops when the image was captured. In this case, the exposure correction curve shape shown in FIG. 6b can be used to modify the rendered code values, in order to perform exposure correction to obtain corrected code values similar to those shown in the "CV normal exposure" column. The curve depicted in FIG 6b was calculated using equation 5 with an offset value of +0.6 log luminance units, in order to correct for the -2 stops exposure error.

[0036] The column labeled "CV +2 stops exposure" provides the rendered code values when the sensor was overexposed by 2 stops when the image was captured. In this case, the exposure correction curve shape shown in FIG. 6c can be used to modify the rendered code values, in order to perform exposure correction to obtain corrected code values similar to those shown in the "CV normal exposure" column. However, since the upper code values (for example the White and Neutral 8 patches) are clipped to the maximum 255 code value, it will be impossible to recover proper code values for these low density patches. The curve depicted in FIG. 6c was calculated using equation 5 with an offset value of -0.6 log luminance units, in order to correct for the +2 stops exposure error.

Patch	Density	CV normal exposure	CV -2 stops exposure	CV +2 stops exposure
White	0.05	244	147	255
Neutral 8	0.23	224	112	255
Neutral 6.5	0.44	186	79	253
Neutral 5	0.70	136	50	239
Neutral 3.5	1.05	79	27	186
Black	1.50	33	4	97

[0037] FIGS. 7a-7b depict two different printing correction curve shapes which are customized for the combination of print media selected in step 122 and printer determined in step 124. FIG. 7a, shows the printing correction curve shape for an Epson color photo stylus 700 printer with Canon Ink jet media. FIG 7b shows the printing correction curve shape for an Epson color photo stylus 700 printer with Kodak Ink jet printer. The curve shape compensates for the differences in code value to density response of the printers onto the different media.

[0038] The exposure correction described in relation to FIGS 6a-6c and the printing correction described in relation to FIGS. 7a-7b can be implemented as part of the printing process (for example step 128) by first applying the exposure correction to the uncorrected full resolution sRGB image using a first lookup table, and then using the output of this first lookup table as the input to a second lookup table which performs the printing correction. Preferably, these two lookup tables are combined into a single lookup table by mapping each input code value through table 1 to the corresponding output of table 2. Using a single lookup table to perform both functions reduces the time required to process the full resolution image data.

[0039] In an alternate embodiment, exposure adjustment is immediately applied to the full resolution image data, rather than being stored (as in step 114) and applied at a later step in the processing (step 128). In this embodiment, the exposure correction is immediately applied to compensate for imperfect exposure in the original scene, and the exposure-corrected image is stored. This full resolution exposure-corrected image can later be displayed, e-mailed, or printed. When the image is printed, a custom tone reproduction correction curve shape is used to compensate for the combination of the printer and media, in order to improve the quality of the prints provided by the printer.

[0040] In another alternate embodiment, the user interface includes, in addition to the exposure setting adjustment, a scene contrast adjustment, as depicted in FIG. 9. The scene contrast adjustment is useful to provide a preferred contrast setting for certain types of scenes (for example flat-looking scenes). In this embodiment, the exposure adjustment screen 340 provides a user adjustable exposure setting interface 354 including both an exposure level control bar 356 with a user adjustable exposure level control setting 358, and a contrast level control bar 364 with a user adjustable contrast level control setting 366. When the image to be improved (for example image 302a in FIG. 3) is first displayed, the CPU 50 displays the uncorrected image as both the "before" correction image 350 and the "after" correction image 352, and sets both exposure level control setting 358 and contrast level control setting 366 to the middle (for example no correction) position.

[0041] As the user moves the contrast level control setting 366 to the left (towards flatten) the image data used to display the "after" correction image is modified using a lookup table implementing a non-linear function that nonlinearly modifies the rendered digital image to effect an exposure-space decrease in contrast. Moving the contrast level control setting 366 to the right (towards expand) causes the image data to be modified using a lookup table that nonlinearly modifies the rendered digital image to effect an exposure-space increase in contrast. The exposure level control setting 358 provides the same exposure adjustments described earlier in relation to FIG. 4. Instead of control bars 356 and 364, the user adjustable exposure setting interface 354 could use one of many other well-known user interface techniques, such as up/down arrows, a box for entering a numeric value, or a radio button selector.

[0042] To provide the scene contrast adjustment, an additional step is inserted after step 4:

$$\text{Log } E'' = \text{Log } E_p + M(\text{Log } E' - \text{Log } E_p) \quad \text{equation 8}$$

where  $E_p$  is the pivot point (for example a middle grey corresponding to a 20% scene luminance value) and  $M$  is the contrast multiplier.

[0043] The exposure corrected and contrast adjusted code values are therefore equal to

$$CV'' = T_{\log}(\text{Log } E'') \quad \text{equation 9}$$

[0044] The contrast function in equation 7 can be replaced by other types of contrast functions, for example the contrast function described in above-cited commonly-assigned U.S. Patent Application Serial No. 09/057,903, incorporated by reference herein.

[0045] Other features of the invention are included below.

[0046] The method further including the step of prior to printing tone scale adjusting the desired exposure modified rendered captured digital image.

[0047] The method wherein the rendered digital image is modified in accordance with the equation

$$CV' = T_{\log}(T_{\log}^{-1}(CV) + \text{Offset}), \text{ where}$$

$CV'$  is the modified rendered code value,  $CV$  is the rendered code value,  $T_{\log}$  is the rendering transform,  $T_{\log}^{-1}$  is the inverse of the rendering transform  $T$ , and  $\text{Offset}$  is the adjustable exposure setting.

[0048] The method wherein the rendered digital image is modified in accordance with the equation

$$CV' = T_{\text{lin}}(T_{\text{lin}}^{-1}(CV) * \text{Gain}), \text{ where}$$

$CV'$  is the modified rendered code value,  $CV$  is the rendered code value,  $T_{\text{lin}}$  is the rendering transform,  $T_{\text{lin}}^{-1}$  is the inverse of the rendering transform  $T$ , and  $\text{Gain}$  is the adjustable exposure setting.

[0049] The method wherein the adjustable exposure setting includes linearly changing an exposure setting value, and using such exposure setting to nonlinearly modify the rendered digital image.

[0050] The method further including storing the rendered digital image and the desired adjustable exposure setting.

[0051] The method further including applying the desired adjustable exposure setting to the rendered digital image to print an image.

[0052] A computer program product comprising a computer readable storage medium having a computer program stored thereon for correcting for exposure in a digital image, comprising the steps of:

- (a) providing a rendered digital image suitable for display and displaying such digital image;
- (b) using an adjustable exposure setting to nonlinearly modify the rendered digital image to effect an exposure change and displaying the exposure modified rendered digital image; and
- (c) iteratively changing the adjustable exposure setting in accordance with the nonlinear function to continuously change the exposure setting and display modified digital images until a desired exposure modified rendered digital

image is displayed.

[0053] A digital image system for correcting for exposure in a rendered digital image, comprising:

- (a) means for storing a plurality of digital images;
- (b) means for selecting one of such rendered digital images; and displaying such rendered digital image;
- (c) adjustable exposure setting means which in accordance with a nonlinear function modifies the rendered digital image to effect an exposure change and displaying the exposure modified rendered digital image; and
- (d) means for iteratively changing the adjustable exposure setting in accordance with the nonlinear function to continuously change the exposure setting and display modified digital images until a desired exposure modified rendered digital image is displayed.

[0054] A method for correcting for exposure in a digital image, comprising the steps of:

- (a) selecting a rendered digital image; and
- (b) using an adjustable exposure Offset value to modify the rendered digital image in accordance with the function

$$T_{\log} (T_{\log}^{-1}(CV) + \text{Offset}), \text{ where}$$

CV' is the modified rendered code value, CV is the rendered code value, Tlog is the rendering transform, Tlog -1 is the inverse of the rendering transform T, and Offset is the adjustable exposure setting.

[0055] A method for correcting for exposure in a digital image, comprising the steps of:

- (a) selecting a rendered digital image; and
- (b) using an adjustable exposure Gain value to modify the rendered digital image in accordance with the function

$$CV' = T_{\text{lin}} (T_{\text{lin}}^{-1}(CV) * \text{Gain}), \text{ where}$$

CV' is the modified rendered code value, CV is the rendered code value, Tlin is the rendering transform, Tlin -1 is the inverse of the rendering transform T, and Gain is the adjustable exposure setting.

[0056] A computer program product comprising a computer readable storage medium having a computer program stored thereon for correcting for exposure in a digital image, comprising the steps of:

- (a) selecting a rendered digital image; and
- (b) using an adjustable exposure Gain value to modify the rendered digital image in accordance with the function

$$CV' = T_{\text{lin}} (T_{\text{lin}}^{-1}(CV) * \text{Gain}), \text{ where}$$

CV' is the modified rendered code value, CV is the rendered code value, Tlin is the rendering transform, Tlin -1 is the inverse of the rendering transform T, and Gain is the adjustable exposure setting.

## PARTS LIST

[0057]

- 10 digital camera
- 12 lens
- 14 image sensor
- 16 A/D converter
- 18 processor
- 20 memory card interface
- 22 color LCD image display
- 24 user buttons
- 26 host interface
- 30 removable memory card
- 32 CD-R disc



34	floppy disc
36	interface cable
40	host computer
42	camera interface
5 44	CD-ROM drive
46	floppy disc drive
48	memory card reader
50	CPU
52	display monitor/screen
10 54	keyboard
55	mouse
56	hard drive
58	local printer
60	modem
15 70	network printing service provider
72	modem
74	computer
76	hard drive
78	printers
20 100	launch
102	intro screen
104	select image source
106	display thumbnail screen
108	select images
25 110	select image icon
112	display selected image
114	user adjusts control
116	more images
120	select printing options
30 122	select media type
124	determine printer type
126	retrieve calibration data
128	apply exposure adjustment
130	print images
35 140	enter shipping info
142	transfer images
144	apply exposure adjustment
146	mail images
300	preview picture screen
40 302	thumbnail images
302a	first selected thumbnail image
302b	second selected thumbnail image
302c	third selected thumbnail image
302d	fourth selected thumbnail image
45 304	arrow controls
306	select all icon
308	print icon
310	slide show icon
312	improve image icon
50 340	exposure adjustment screen
350	"before" correction picture
352	"after" correction picture
354	exposure setting interface
356	exposure level control bar
55 358	exposure level control setting
360	OK icon
362	Cancel icon
364	contrast level control bar

- 366 contrast level control setting
- 400 print function display screen
- 402 layout icons
- 404 media selection menu
- 5 408 copies selection menu
- 410 local printing icon
- 412 network printing icon
- 420a image
- 420b image
- 10 420c image
- 420d image
- 422 print preview area

# Claims

15

1. A method for correcting for exposure in a digital image, comprising the steps of:

- (a) providing a rendered digital image suitable for display and displaying such digital image;
- 20 (b) using an adjustable exposure setting to nonlinearly modify the rendered digital image to effect an exposure change and displaying the exposure modified rendered digital image; and
- (c) iteratively changing the adjustable exposure setting in accordance with the nonlinear function to change the exposure setting and display modified digital images until a desired exposure modified rendered digital image is displayed.

- 25 2. The method of claim 1 wherein the rendered digital image is modified in accordance with the equation

$$CV' = Tlog (Tlog^{-1}(CV) + Offset), \text{ where}$$

30 CV' is the modified rendered code value, CV is the rendered code value, Tlog is the rendering transform, Tlog<sup>-1</sup> is the inverse of the rendering transform T, and Offset is the adjustable exposure setting.

3. The method of claim 1 wherein the rendered digital image is modified in accordance with the equation

$$CV' = Tlin (Tlin^{-1}(CV) * Gain), \text{ where}$$

35 CV' is the modified rendered code value, CV is the rendered code value, Tlin is the rendering transform, Tlin<sup>-1</sup> is the inverse of the rendering transform T, and Gain is the adjustable exposure setting.

4. The method of claim 1 wherein the adjustable exposure setting includes linearly changing an exposure setting value, and using such exposure setting to nonlinearly modify the rendered digital image.
- 40

5. The method of claim 1 further including storing the rendered digital image and the desired adjustable exposure setting.

- 45 6. The method of claim 5 further including applying the desired adjustable exposure setting to the rendered digital image to print an image.

7. The method of claim 1 further including the step of:

- 50 (d) using an adjustable contrast setting to nonlinearly modify the rendered digital image to effect a contrast change.

8. A method for correcting for exposure in a digital image, captured by an image capture device which is to be printed on a printer, comprising the steps of:

55

- (a) rendering such captured digital image suitable for display and displaying such captured digital image;
- (b) using an adjustable exposure setting to nonlinearly modify the rendered digital image to effect an exposure change and displaying the exposure modified rendered digital image; and

(c) iteratively changing the adjustable exposure setting in accordance with the nonlinear function to change the exposure setting and display modified digital images until a desired exposure modified rendered digital image is displayed.

5 9. The method of claim 8 further including the step of

(d) using an adjustable contrast setting to nonlinearly modify the rendered digital image to effect a contrast change.

10 10. A computer program product comprising a computer readable storage medium having a computer program stored thereon for correcting for exposure in a digital image, comprising the steps of:

(a) selecting a rendered digital image; and

(b) using an adjustable exposure Offset value to modify the rendered digital image in accordance with the function

$$T_{\log} (T_{\log}^{-1}(CV) + \text{Offset}), \text{ where}$$

CV' is the modified rendered code value, CV is the rendered code value, Tlog is the rendering transform, Tlog<sup>-1</sup> is the inverse of the rendering transform T, and Offset is the adjustable exposure setting.

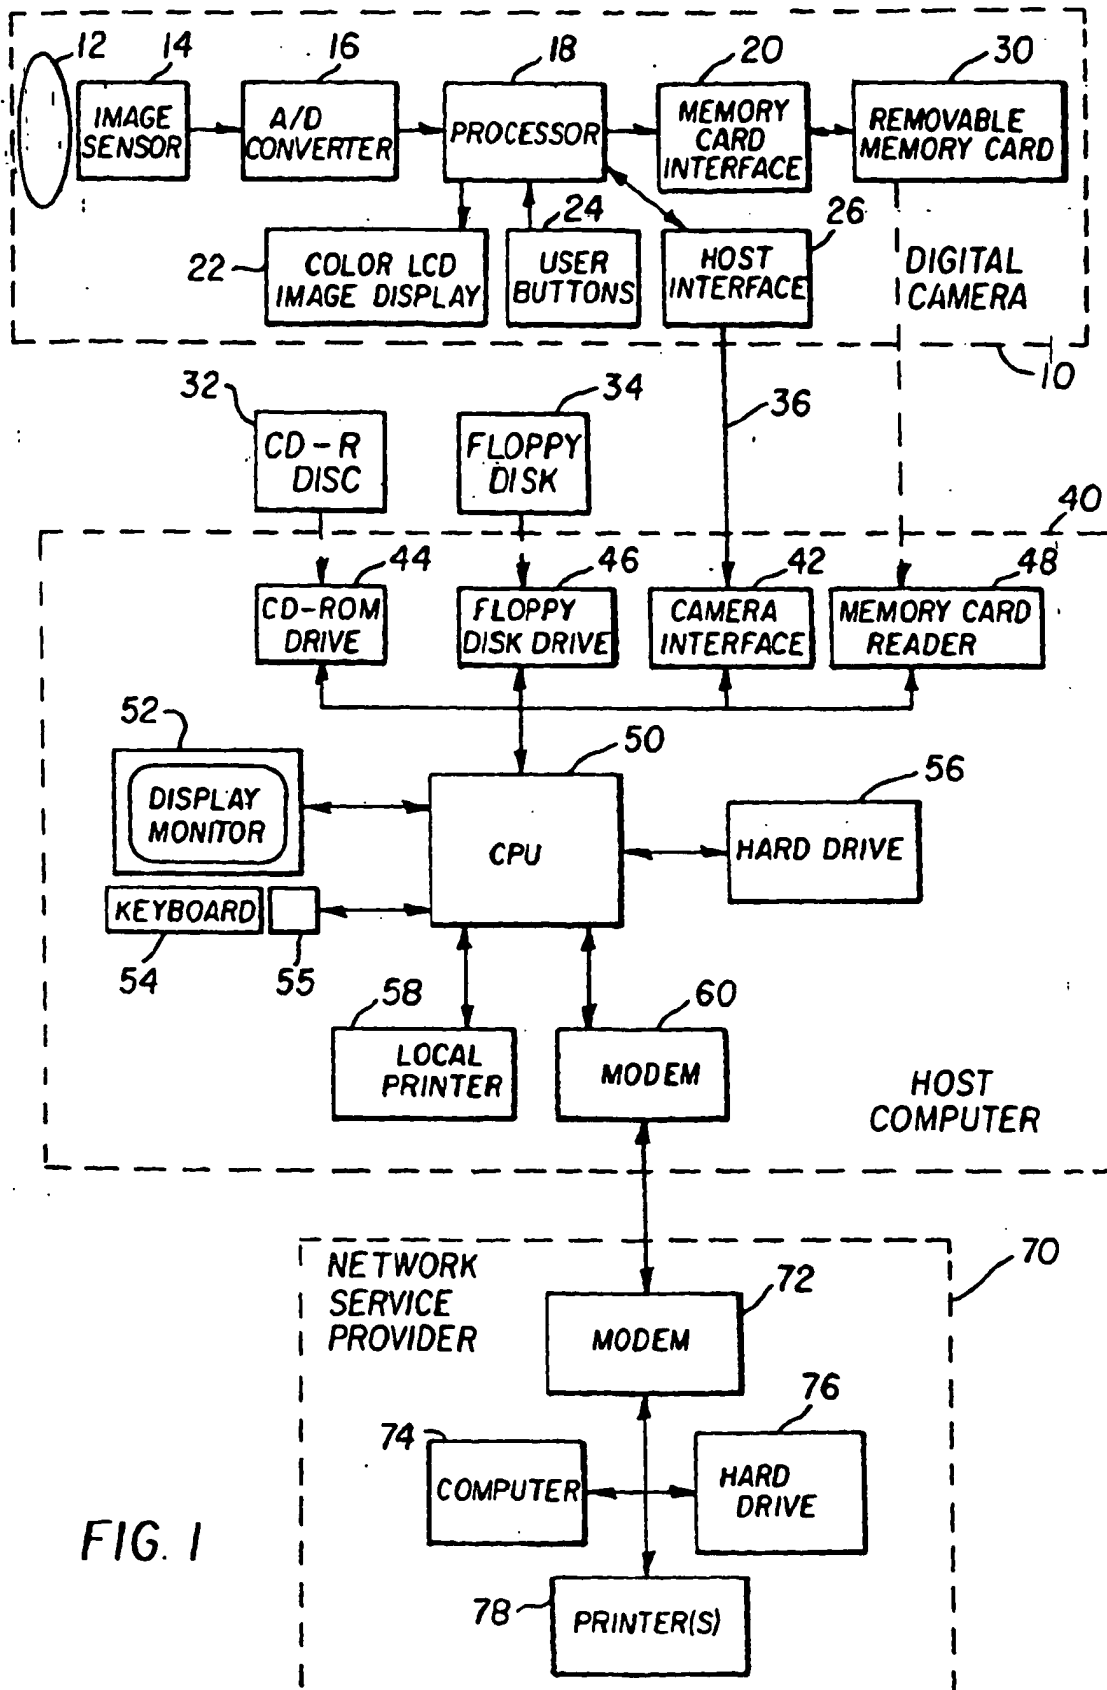


FIG. 1


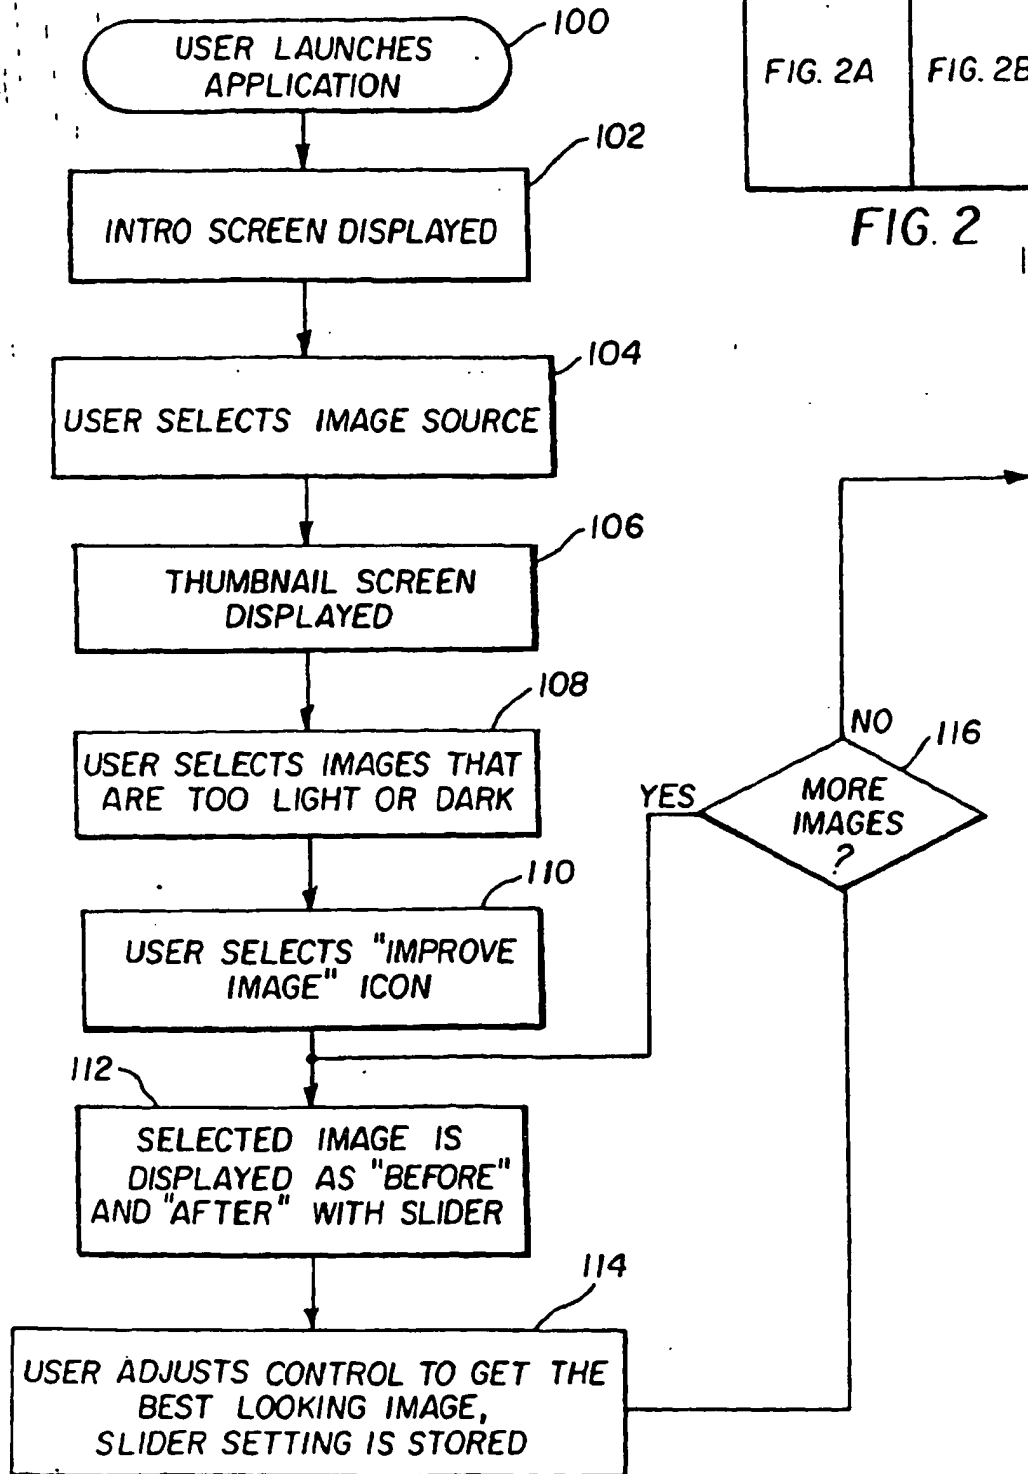


FIG. 2

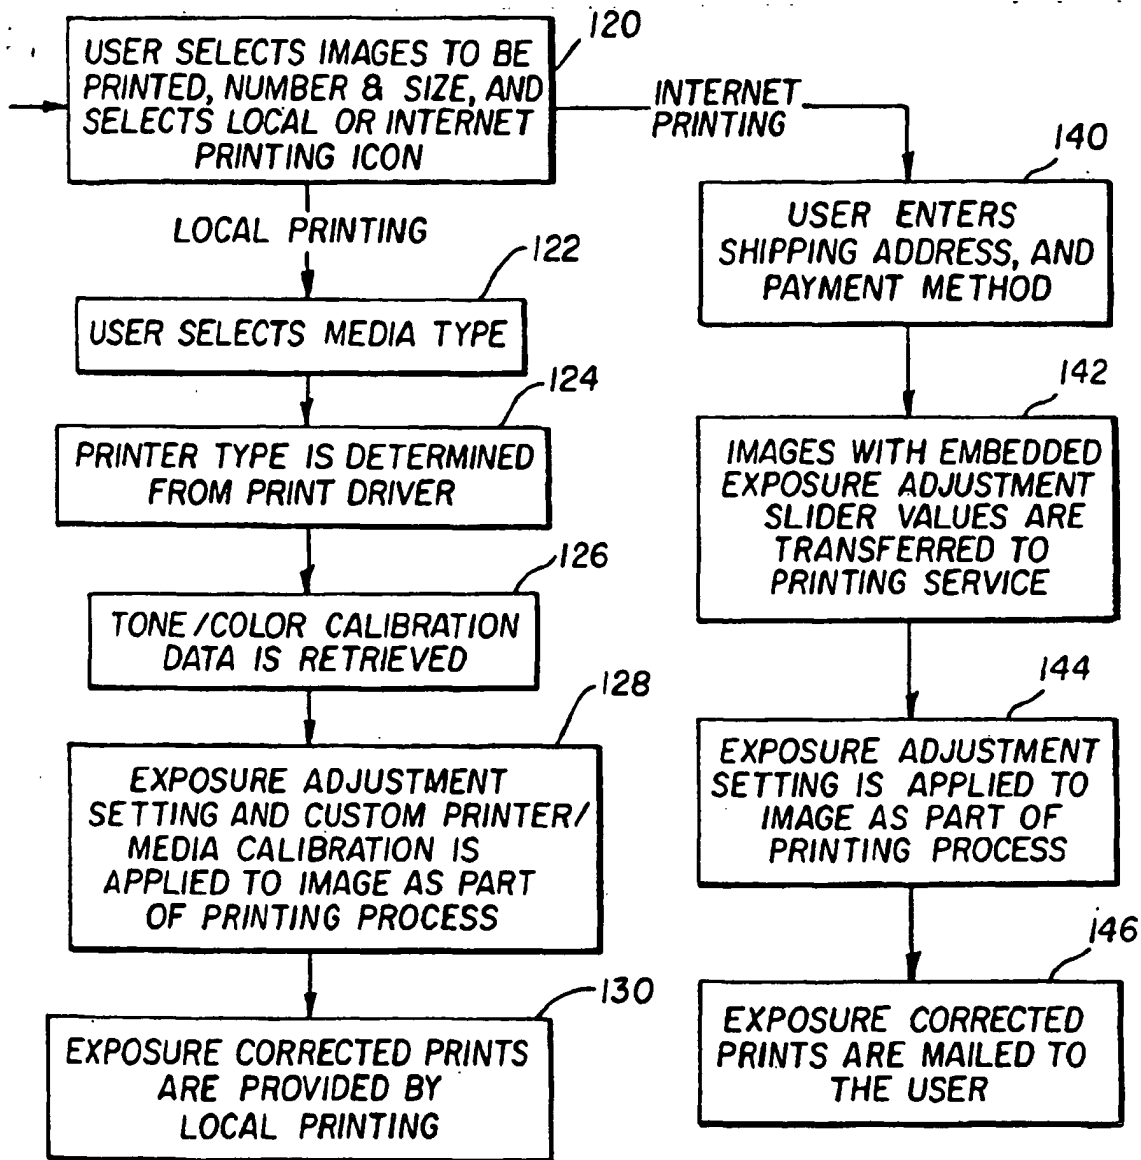


FIG. 2B

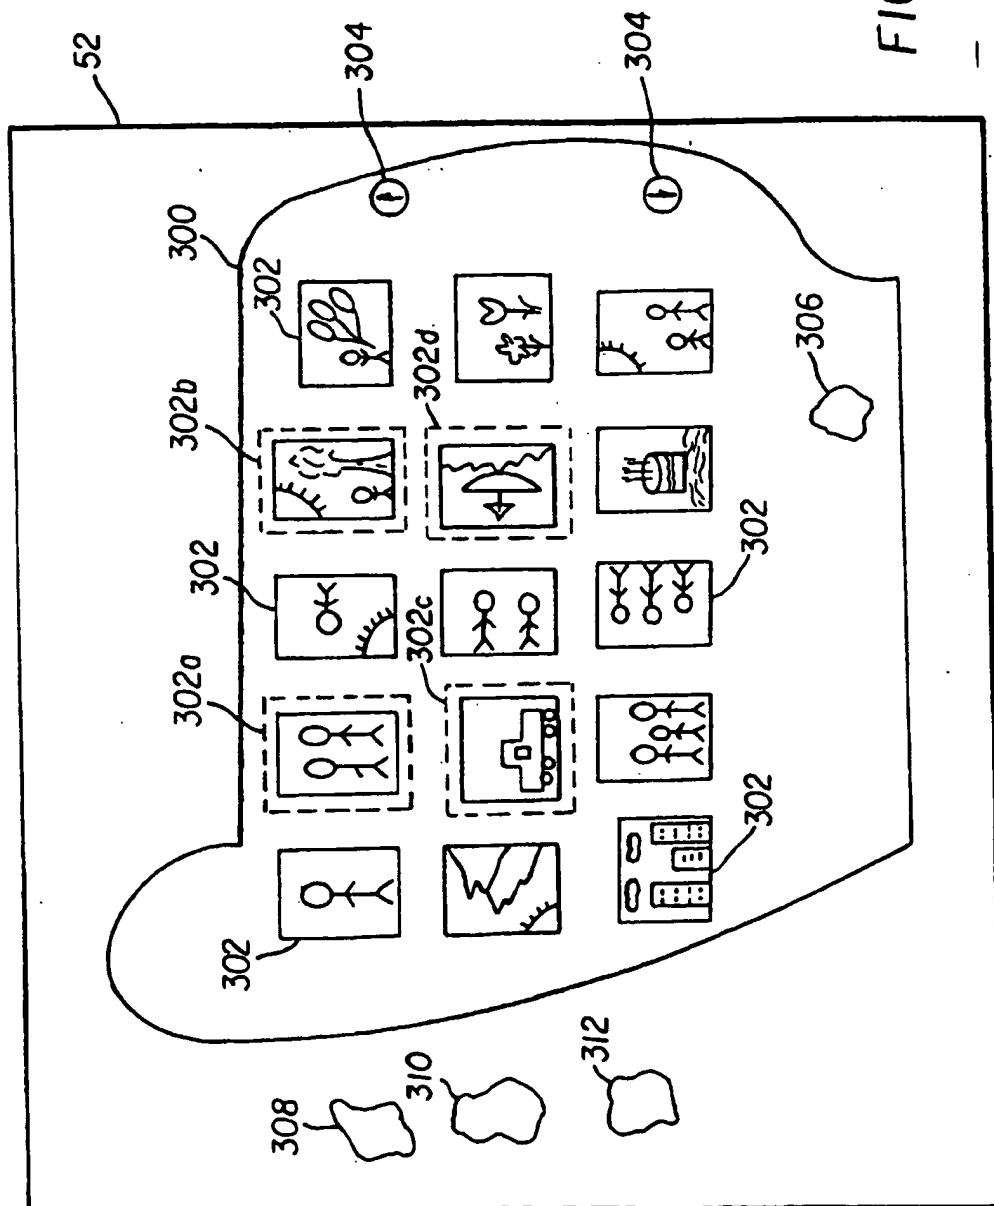


FIG. 3

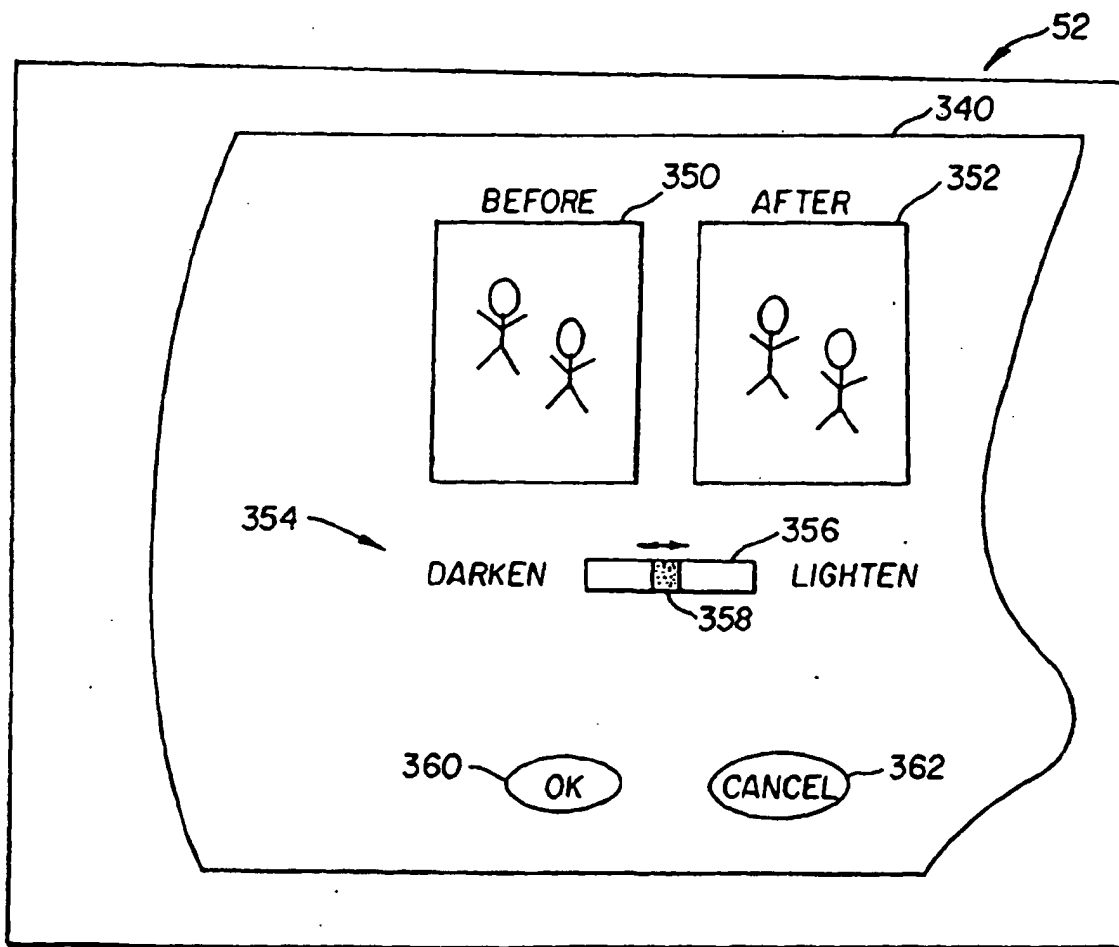


FIG. 4



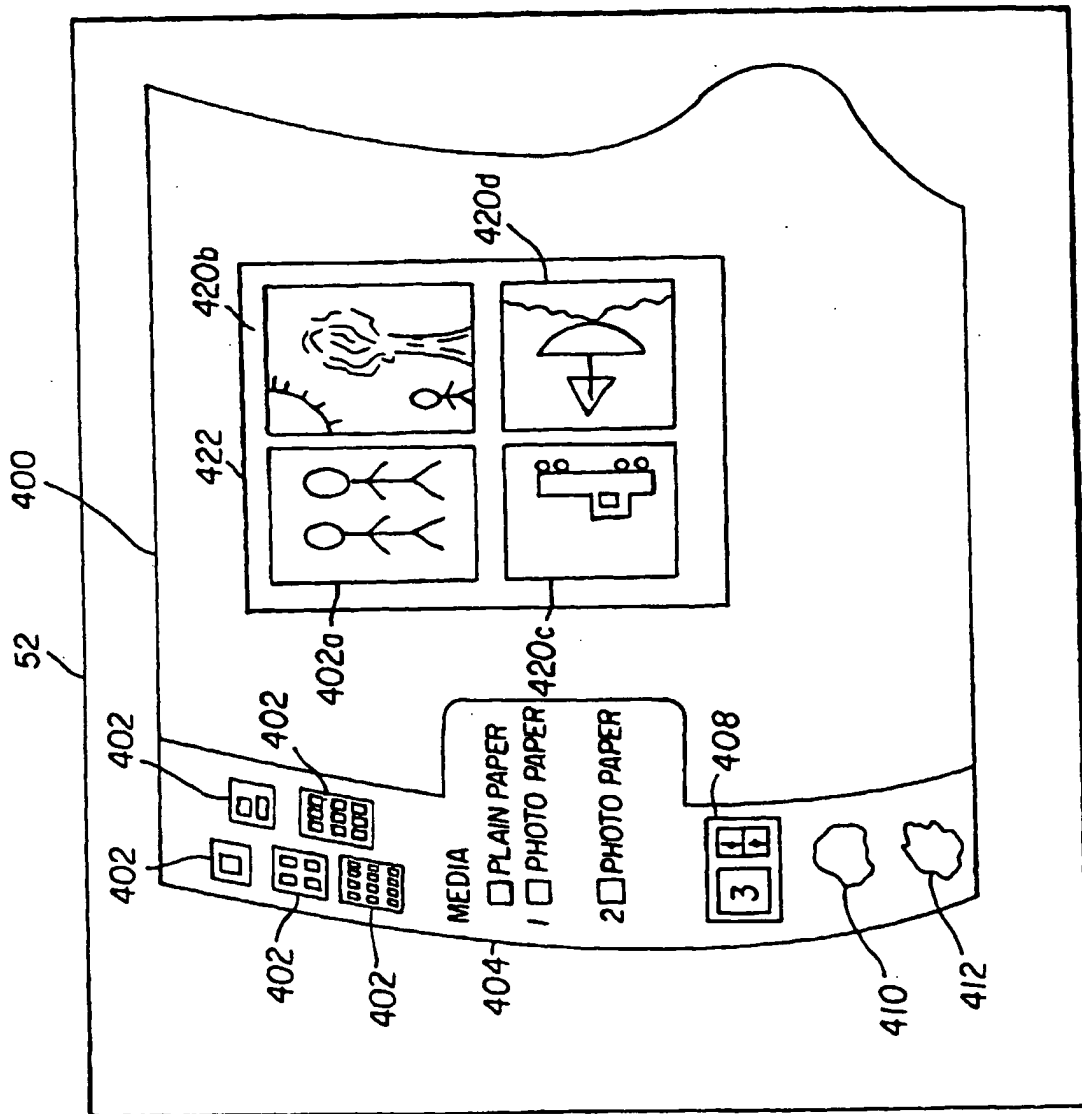


FIG. 5

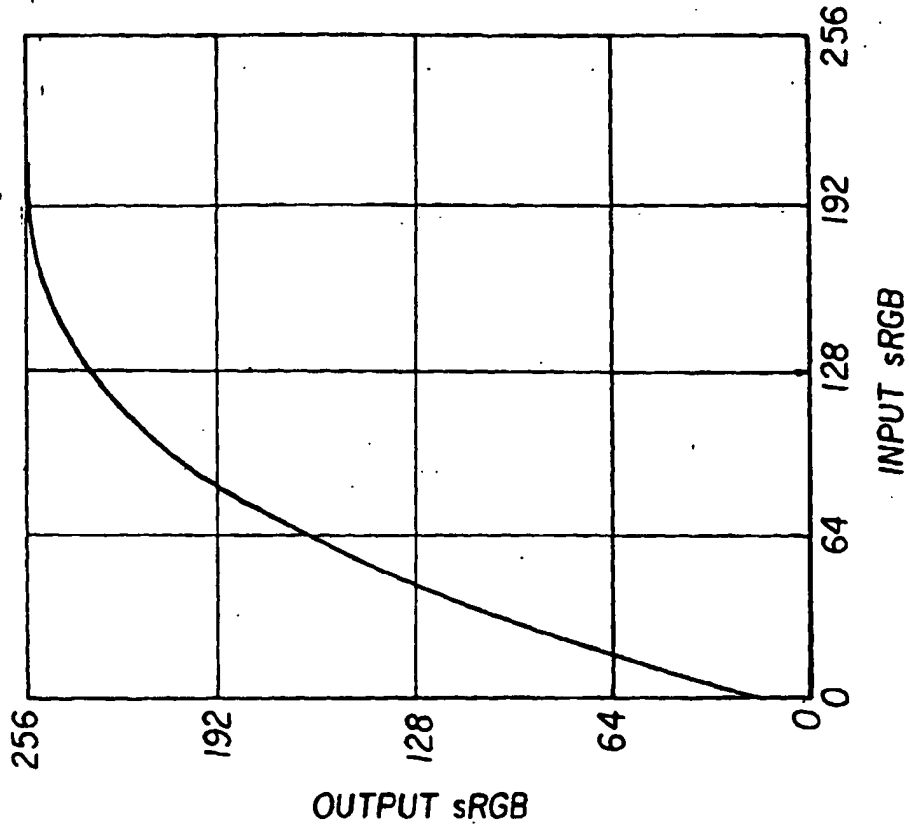


FIG. 6A

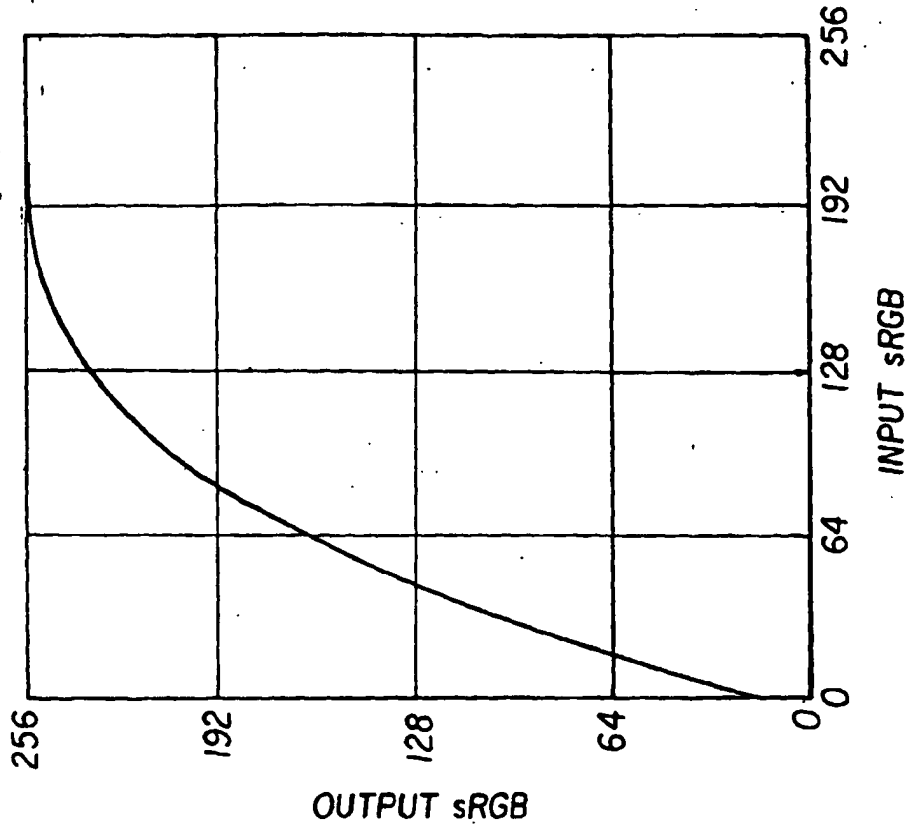


FIG. 6B

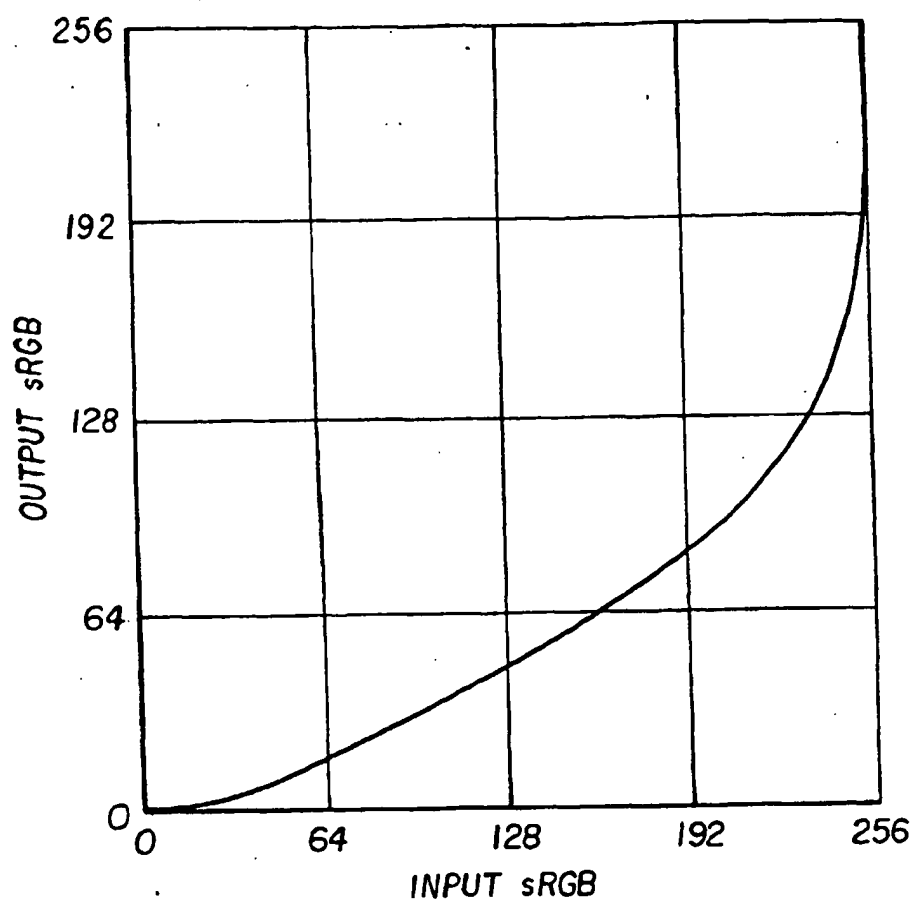


FIG. 6C

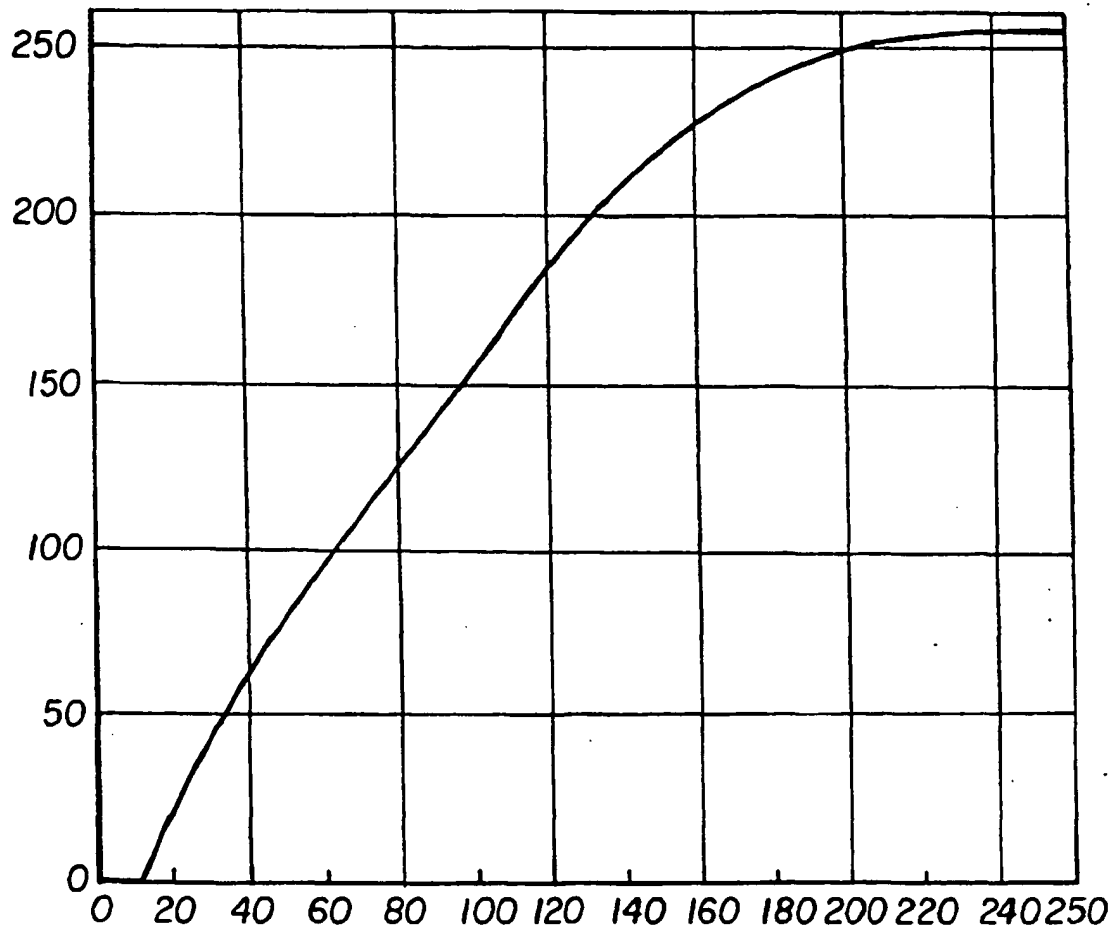


FIG. 7A

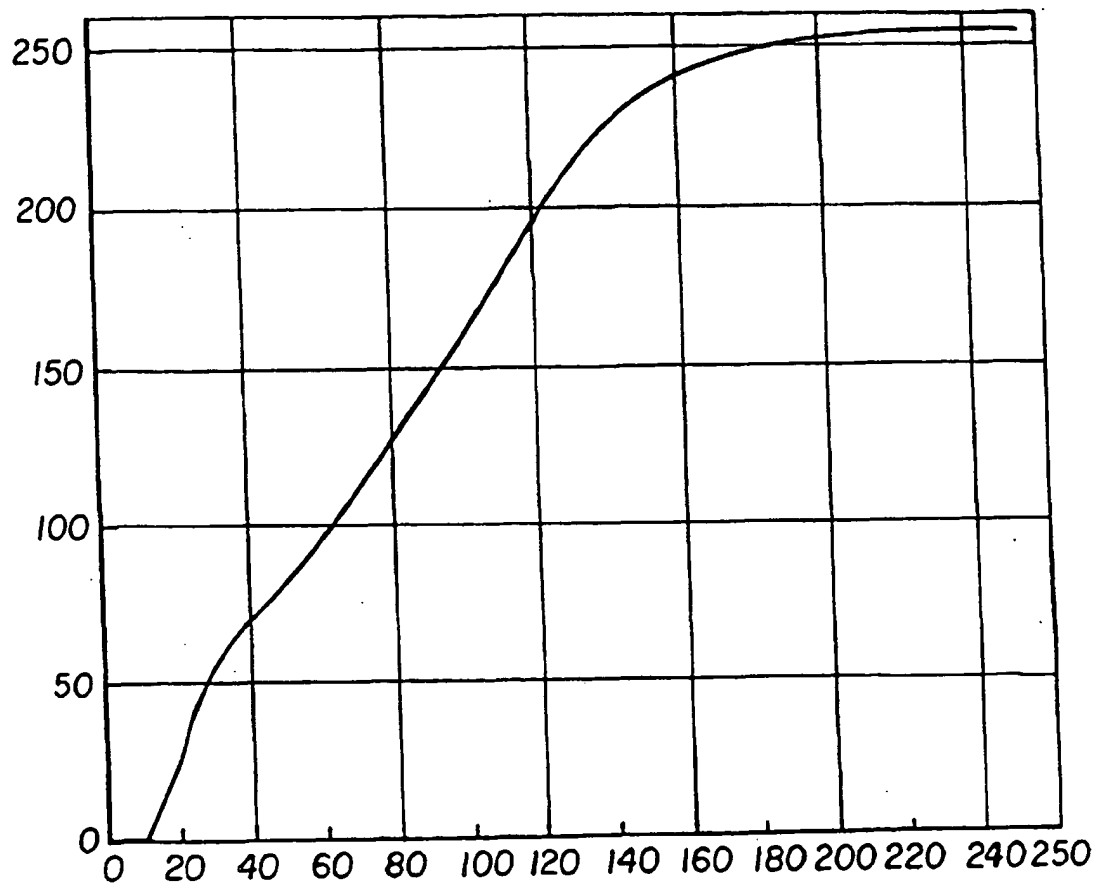


FIG. 7B

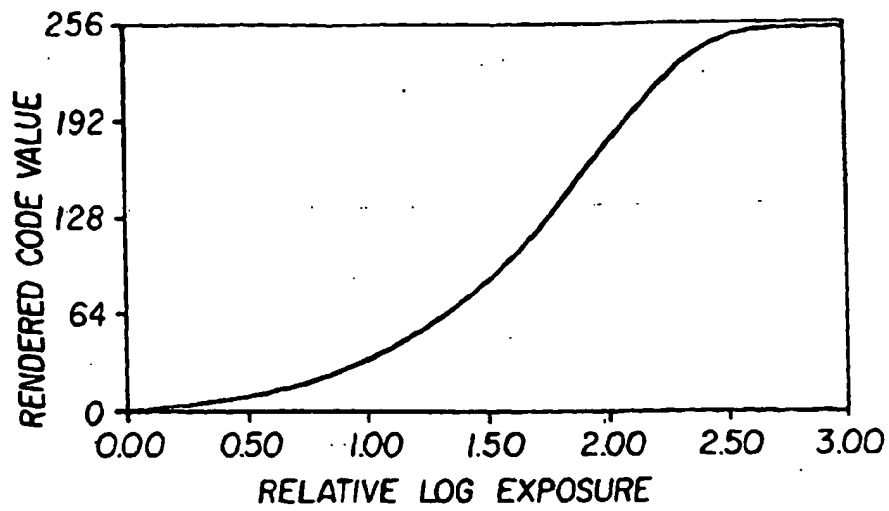


FIG. 8

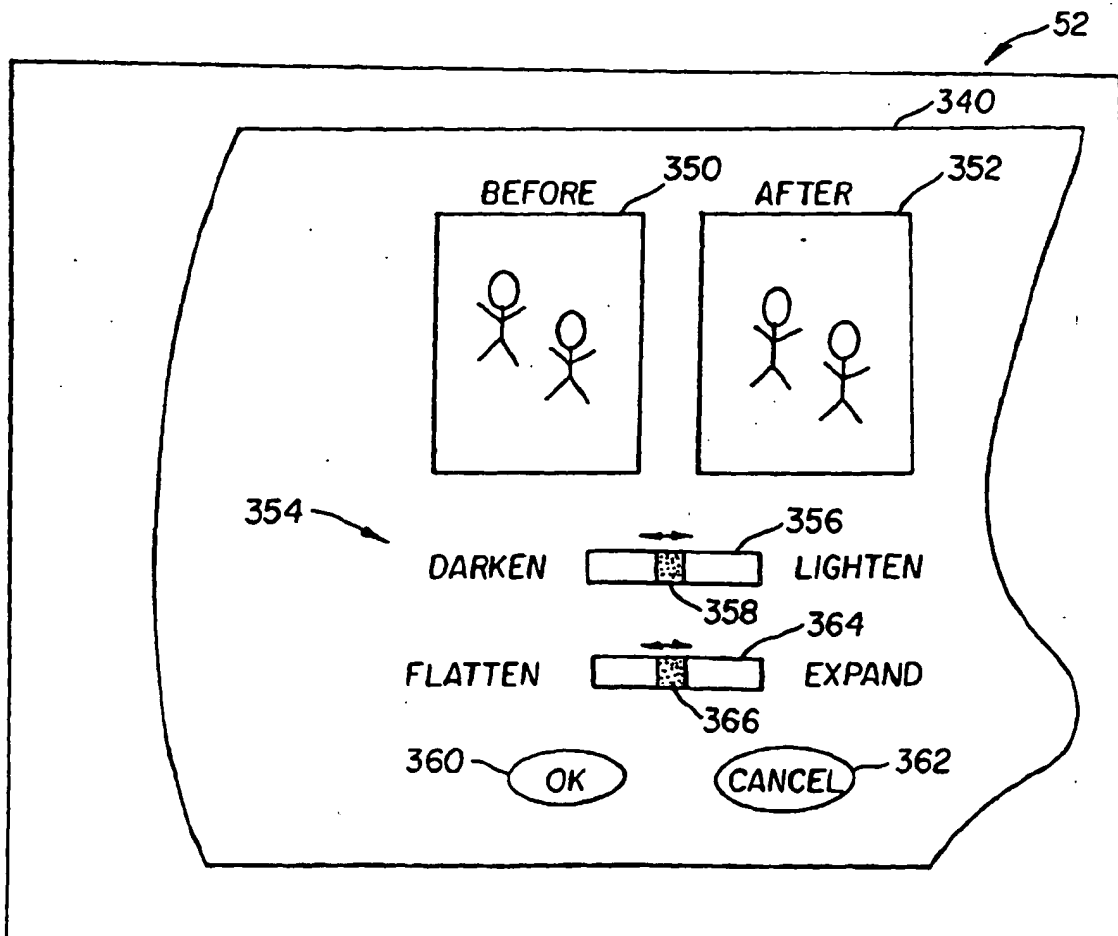


FIG. 9



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 20 1646

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IntCl.7)
X	EP 0 441 609 A (LEVIEN RAPHAEL L) 14 August 1991 (1991-08-14) * abstract; figures 1-5,8 * * page 4, line 46 - line 56 * * page 5, line 56 - line 58 * * page 6, line 31 - line 47 * * page 8, line 44 - line 46 *	1-10	H04N1/407
A	EP 0 377 386 A (EASTMAN KODAK CO) 11 July 1990 (1990-07-11) * abstract; figures 5-8 *	1,7,8	
A	WO 97 31475 A (PAKON INC) 28 August 1997 (1997-08-28) * abstract; figures 6-9 * * page 12, line 15 - line 21 *	1,8	
A	EP 0 356 328 A (YAMATOYA SHOKAI) 28 February 1990 (1990-02-28) * abstract; figures 1-3 * * page 17, line 50 *	2-5,7,8	
A	EP 0 889 636 A (FUJI PHOTO FILM CO LTD) 7 January 1999 (1999-01-07) * abstract; figures 10,11,16,22,63 * * page 14, line 49 - page 15, line 30 *	1,8	
A	US 5 644 647 A (COSGROVE PATRICK ANDRE ET AL) 1 July 1997 (1997-07-01) * abstract; figures 3-5 *	1,8	
-/--			
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 15 August 2000	Examiner Kassow, H
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons S : member of the same patent family, corresponding document</p>			

EPO FORM 1501 (03.92) (P4/C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 20 1646

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	BHUKHANWALA S A ET AL: "AUTOMATED GLOBAL ENHANCEMENT OF DIGITIZED PHOTOGRAPHS" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, US, IEEE INC. NEW YORK, vol. 40, no. 1, 1 February 1994 (1994-02-01), pages 1-10, XP000441777 ISSN: 0098-3063 * page 5 - page 6 *	1,4-7,9	
A	EP 0 606 926 A (CANON KK) 20 July 1994 (1994-07-20) * abstract *	8	
A	EP 0 804 018 A (CANON KK) 29 October 1997 (1997-10-29) * abstract; figures 7-9,16-20,26,27 *	8	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search BERLIN		Date of completion of the search 15 August 2000	Examiner Kassow, H
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02) (P4/C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 1646

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on the European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-08-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0441609 A	14-08-1991	US 5155588 A	13-10-1992
		AT 136710 T	15-04-1996
		DE 69118566 D	15-05-1996
		DE 69118566 T	24-10-1996
		JP 4213965 A	05-08-1992
EP 0377386 A	11-07-1990	US 5012333 A	30-04-1991
		DE 68923949 D	28-09-1995
		DE 68923949 T	18-04-1996
		JP 2226375 A	07-09-1990
WO 9731475 A	28-08-1997	US 5872591 A	16-02-1999
		EP 0882355 A	09-12-1998
		US 6037974 A	14-03-2000
EP 0356328 A	28-02-1990	JP 2057066 A	26-02-1990
		JP 2796718 B	10-09-1998
		DE 68921119 D	23-03-1995
		DE 68921119 T	12-10-1995
		US 4956718 A	11-09-1990
EP 0889636 A	07-01-1999	AU 7395498 A	07-01-1999
		JP 11073295 A	16-03-1999
		JP 11073382 A	16-03-1999
		JP 2000030073 A	28-01-2000
US 5644647 A	01-07-1997	CA 2072629 A,C	18-03-1992
		DE 69125700 D	22-05-1997
		DE 69125700 T	23-10-1997
		EP 0500926 A	02-09-1992
		JP 5502741 T	13-05-1993
		WO 9205470 A	02-04-1992
EP 0606926 A	20-07-1994	JP 7038685 B	26-04-1995
		JP 63120561 A	24-05-1988
		DE 3750538 D	20-10-1994
		DE 3750538 T	26-01-1995
		DE 3752256 D	01-04-1999
		DE 3752256 T	19-08-1999
		EP 0267566 A	18-05-1988
		US 4882621 A	21-11-1989
EP 0804018 A	29-10-1997	JP 10067127 A	10-03-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82